



Burris

FIND WHAT MATTERS

FASTFIRE™ 4




User Guide

FastFire™ 4

Mutli-Reticle Reflex Sight

Congratulations on purchasing the Burris® FastFire 4! This versatile Multi-Reticle reflex sight will be the perfect fast-action sighting solution for your handgun, rifle or shotgun. You will enjoy the following features in your FastFire 4 sight:

- **Compact & Lightweight.** Weighing less than 1 ounce, the FastFire 4 won't affect firearm balance or handling. The frame is built from anodized aluminum for ultimate reliability and recoil resistance.
- **1x Magnification.** The parallax-free, 1x FastFire 4 allows for both-eyes-open shooting, for enhanced awareness and better accuracy.
- **Choice of 4 Reticles.** Toggle through four reticles for optimal accuracy from close to far.
- **4 Brightness Settings.** The Automatic Brightness Setting automatically adjusts the brightness of the reticle to match the environmental conditions, while 3 manual brightness settings let you control the intensity of the reticle.
- **Windage & Elevation Adjustments.** Fine-tune your point-of-aim with the special tool provided.

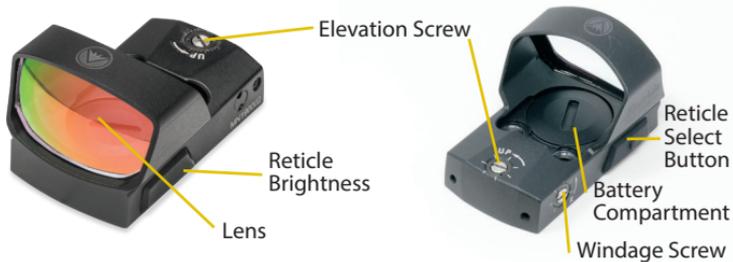

Operating Instructions

For optimum performance and to prevent damage to this precision instrument, carefully follow all instructions.

Package Contents:

- 2 #6x48 Screws with Torx® socket head for installing the sight on the mounting plate
- 1 Torx® Wrench
- 1 Protective Cover
- 1 Lithium Battery 3V (CR1632)
- User Guide
- Weaver/Picatinny-style Mount
- 1 Hex Wrench
- 1 Adjustment/Battery cover screwdriver

Specifications:

- Magnification: 1.07x
- Sight Window: 29mm x 18.75mm, 1.14" x 0.73"
- Elevation adjustment range: 90 MOA
- Windage adjustment range: 90 MOA
- Recoil resistance: 1000 G's
- Operating Temperature Range: -10°F to +130°F (-25°C to +55°C)
- Storage Temperature Range: -40°F to +160°F (-40°C to +70°C)
- Power Supply: 3V with one CR1632 Lithium battery
- Dimensions: (LxWxH) 1.9" x 1.23" x 1.0"
(48.2mm x 25.4mm x 25.4mm)
- Weight (in operating condition without mounting materials):
1.06 oz. (45.3 grams)

Torx® is a registered trademark of Camcar/Textron

Cautions and Warnings

Make sure the firearm is unloaded before mounting the optic. Do not look through the sight directly into the sun, light arcs, or other very high-intensity light sources. Keep away from children.

Battery Installation

The FastFire 4 operates with one commercially available 3V Lithium battery (CR1632). Do not attempt to substitute two CR2016 batteries.

To insert or replace the battery, unscrew the battery cap on the top of the sight using the special combination screwdriver included.

Make sure that the positive pole of the battery is facing up.

Replace the battery cap, but do not over

tighten. Keeping the battery contact surfaces clean will ensure reliable operation.




Installation

Installation on most rifles, carbines, and some handguns requires the included Picatinny/ Weaver Mounting Plate. Most other handguns, shotguns and rifles require a different mounting plate. To determine the correct mount for your firearm, go to: <https://www.burrisoptics.com/mounting-systems/mounts-and-bases/fastfire-mou>



Picatinny / Weaver Mount

To install the FastFire 4 on a Picatinny or Weaver-style base, loosen the clamp nut on right side of the mount. Place the mount on the rail with the cross screw in the desired slot. Check to be sure all the clamping edges are engaged. Keep a little pressure on the sight toward the muzzle as you tighten the clamp nut to approximately 20 in-lbs.

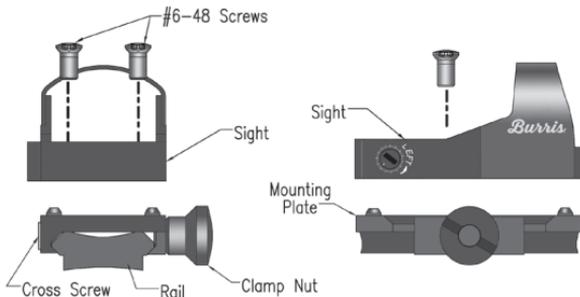

Operating Procedure

Elevation and Windage Adjustment

There are separate adjustment screws for elevation and windage. The elevation adjustment screw is located on the top of the sight, and the windage screw is located on the right side. The windage adjustment mechanism has limit stops at both ends. Screwing either adjustment into a stop will lock motion of the other adjustment.



Zeroing the Point-of-Impact

Adjust the point-of-impact by using the included adjustment/battery cover tool. The direction of the shift of the point-of-impact is indicated on the elevation and windage adjustment screws. The tick marks are for reference only and do not correspond with a specific amount of reticle adjustment.

Power Modes

The sight powers ON with a press of either the left or right control buttons. For greater versatility to accommodate any light condition, there are four settings that can be used to adjust the brightness of the reticle each time the Reticle Brightness button is pushed. These include:

- #1 – Automatic adjustment. A light sensor automatically senses the surrounding light conditions and adjusts the brightness so that it is not overpowering in low light, yet visible in bright daylight.
- #2 – Lowest brightness setting
- #3 – Medium brightness setting
- #4 – Highest brightness setting


To turn the power off, simply press and hold the Reticle Brightness button for 2 seconds to completely shut off the electrical circuit and save your battery.

If the battery life falls below the limit of 4 hours, the reticle will begin to blink twice every 5 seconds.

Reticle Selection

The FastFire 4 offers four different reticle patterns. Use the Reticle Selection button to select the best pattern for your style of shooting. Choices include:

- 3 MOA Red Dot
- 11 MOA Red Dot
- 11 MOA Red Dot with Circle
- 3 MOA Red Dot, Circle & Wings

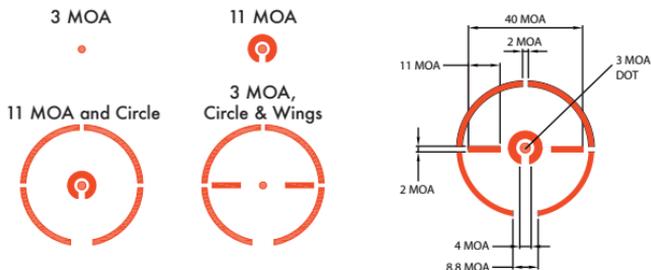

Integrated Control Electronics

The integrated control circuit adjusts the brightness of the reticle according to surrounding light levels. The brightness sensor senses the light level in the direction of the target and modifies the intensity of the reticle accordingly so that it is not overpowering in low light while remaining highly visible in bright daylight. Be careful not to obstruct the sensor. Clean if necessary. Covering the sensor with your finger will affect the electronics only slightly.

Installing Weather Shield

The FastFire 4 is water-proof and will withstand rain or snow. However, the Weather Shield protects the sight from moisture and provides a clearer sight picture during inclement weather. To install the shield, slide the cover over the top of sight. Use the provided hex wrench to fasten the two screws at the back of the sight. Do not over-tighten. Once installed the shield will protect from rain or snow and will stay attached even when mounted on a pistol slide.



NOTE: The sight is also usable even after being accidentally submerged. After exposure to salty or dirty water, it is advisable to rinse with distilled water and dry the sight, as with any quality optical equipment. Remove dirt by blowing it off or use a very soft brush. Use lens cleaning tissues on the optical surfaces.

Warranty

The FastFire 4 is covered by the
Burris Forever Warranty.™



Thank you for choosing Burris. You can be confident that the optic you purchased is built to the most exacting standards. You can count on Burris to perform every time you use it.

We're so confident in the craftsmanship of our products that we back them with a no questions asked Forever Warranty.

We will repair or replace your Burris optic if it is damaged or defective. The warranty is automatically transferred to future owners.

- No repair or replacement charge
- No warranty card needed
- No receipt required
- No questions asked



Burris Company
331 East 8th St.
Greeley, CO 80631
(970) 356-1670
BurrisOptics.com
Facebook.com/BurrisOptics
INSTR-9513